



# Carpet Specifications



# strido

**600 Gram Polyester Fabric**  
Resistant to being punctured by heels and display fixtures

**Easy To Clean**  
Simply vacuum tiles on a medium to low setting


**24" x 24" Tile Size**  
Convenient to transport and quick to install

**35-40 Degree Foam Density**  
Ideal firmness for commercial and residential applications

**Shock Absorbing EVA Foam**  
Reduces stress on back and feet and improves productivity

**Interlock Edge Design**  
Makes assembly easy and keeps the tiles connected

**Non-Slip Back**  
Assembled floors will not move

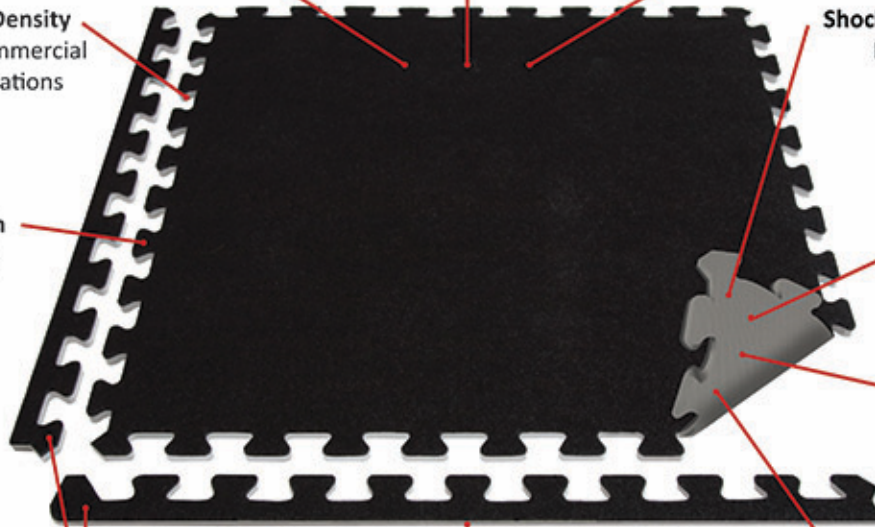

**Closed Cell Foam**  
Impervious to water and other liquids

**Two Straight Edges Per Tile**  
Ensures a professional looking finished edge to your floor

**1/2" Tile Thickness**  
Minimizing the risk of tripping on the edge

**T-Pattern On The Back**  
Adds flexibility as it makes the tiles reversible